
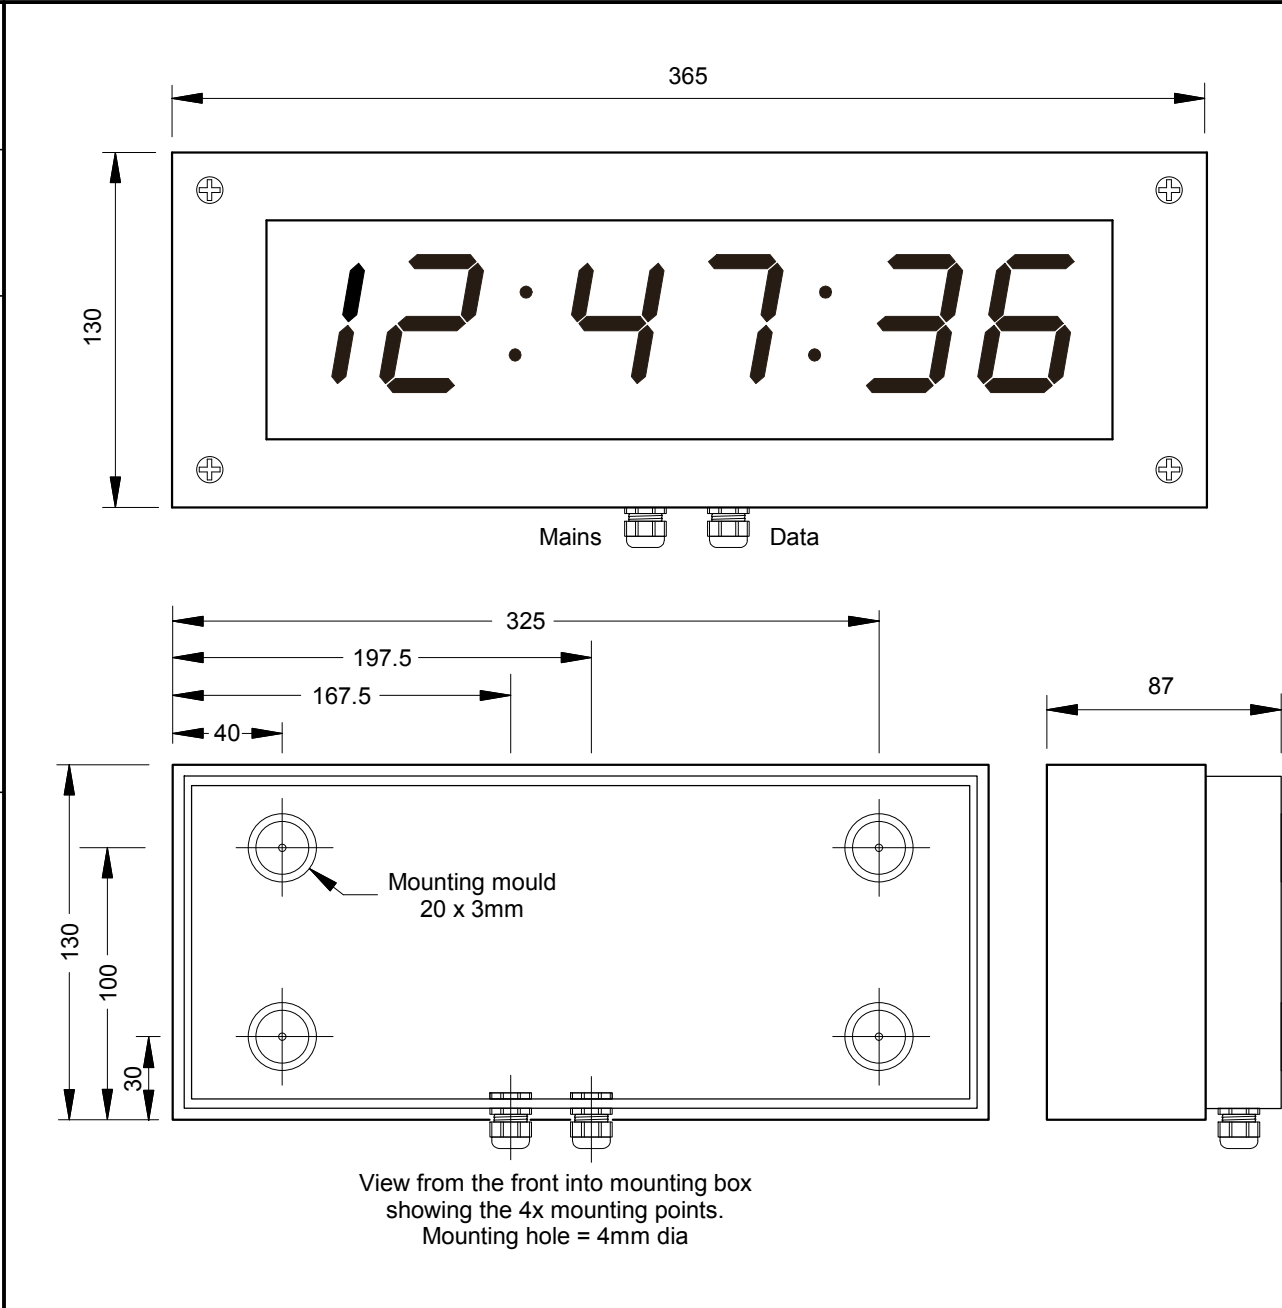


JOB NO.:	DWG NO.:	TITLE:
DATE:	SCALE:	4010E.057.x.SE LED Wall Clock in IP65 water proof case
DWN: NM	SIZE: A4	CLIENT:
COPYRIGHT: The drawing remains the property of Hertz Electronics PL and may not be used, copied, or reproduced in whole or part in any form without written permission.		
 <p>P.O. Box 115 - 18 Rose Street ANNANDALE NSW 2038 Ph: +61 2 8205 0575 Fax: +61 2 9571 9754 Email: sales@hertzelectronics.com.au Web: www.hertzelectronics.com.au</p> <p>A.B.N. 69 086 651 014</p>		



4010E.057.x.SE

12/24 HourDisplay
Red, green or yellow LED
x = R (red), G (green), Y (yellow)
57mm Figures: Viewing Distance: 25m
Automatic Daylight Saving Changes
Automatic Dimming
Alternating Time & Date Capability
Stop Watch/Count Down Function
(with supplied infra-red remote)
Temperature display (with optional
temperature probe)
Stand-alone or networking
Built in Quartz Crystal with accuracy
of 0.1 sec/day
240VAC 50 Hz mains supply with
battery back-up
Optional 24VDC power supply

Synchronisation

In slave clock mode the 4010E can be synchronised using following signals:

- 482 Time Code
- DCF Time Code
- GPS Time Code

Optional Modules

404.E EBU/SMPTE synchronisation
404.I IRIG-B synchronisation
404.M Master clock for up to 10x clocks
404.R Relay module, rated 24V 1A