


4010E.12.x.S External Dimensions

.S. Surface Mounted Case

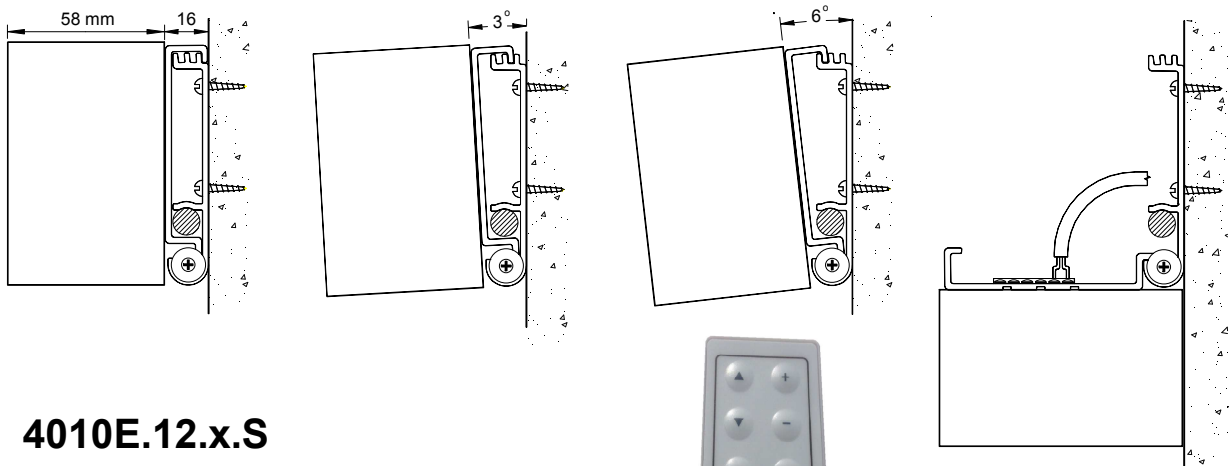

4010E.12.x.S

- Long life commercial design
- 12/24h display
- Red, green, yellow or white bright LEDs
- Automatic daylight saving changes
- Automatic or manual dimming
- Battery back-up
- Alternating time & date capability
- Temperature display (requires optional temperature probe)
- Stopwatch/Count-down timer function (via infra-red remote)
- Stand alone or slave/master clock operation
- Built in Quartz Crystal with accuracy of 0.1 sec/day at 21deg. C
- 240VAC 50 Hz mains supply with battery back-up standard
- Optional 24 or 48VDC power supply
- 120mm Figures = 60m legibility



Infra-red remote control

Synchronisation


In slave clock mode the 4010E can be controlled by the following signals:

- 482 Time Code
- Impulses
- GPS
- RS232 with optional module
- RS422 with optional module

NTP Networking

Model 4010N is equipped with 10/100Base-T network port, allowing the clock to be connected to the TCP/IP network for synchronisation with an NTP/SNTP time server.

Order Number	LED Colour	Case Size L x H x D	Optional Case Finishes
4010E.12.R.S 4010E.12.G.S 4010E.12.Y.S 4010E.12.W.S	Red Green Yellow White	670 x 180 x 58	Standard: black anodised Options: - silver anodised - other anodised and powder-coated finishes at extra cost

JOB NO.:		TITLE	4010E.12.x.S Digital LED Clock in aluminium surface mounting case	
DATE:				
DWN:		CUSTOMER:		

A.B.N. 69 086 651 014
 P.O. Box 115 - 18 Rose Street ANNANDALE NSW 2038
 Ph: +61 2 8205 0575 Fax: +61 2 9571 9754
 Email: sales@hertzelectronics.com.au
 Web: www.hertzelectronics.com.au