


4010E.220.x.S External Dimensions

.S. Surface Mounted Case

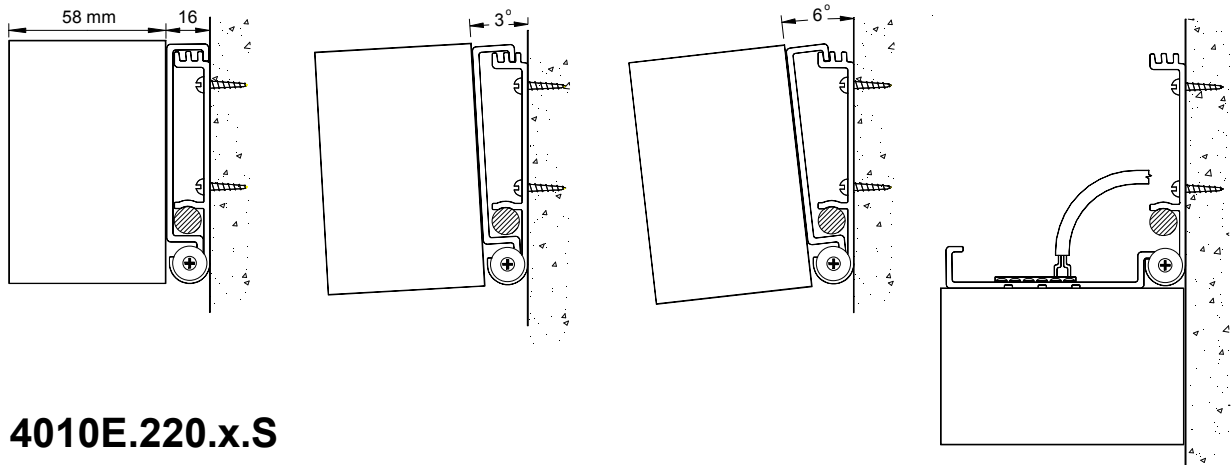

4010E.220.x.S

- 12/24 Hour Display
- Red or green LED (green is more expensive)
- 220mm Figures: Viewing Distance: 100-120m
- Automatic Daylight Saving Changes
- Automatic or manual Dimming in 7-steps
- Battery Back-up
- Alternating Time & Date Capability
- Temperature Display (with optional temperature probe)
- Stopwatch/Countdown Function (with infra-red remote controller)
- Built in Quartz Crystal with accuracy of 0.1 sec/day at 21deg. C
- 240VAC 50 Hz mains supply standard
- Optional 24 or 48VDC power supply

Optional Modules

- Optional low-cost internal wBus2 interface cards:
- EBU/SMPTE synchronisation
 - IRIG-B/Afnot NF S 87-500 synchronisation
 - RS232, RS485
 - 24V/48V Single/Alternate polarity impulse

Synchronisation

The 4010E can be synchronised from the following external signals:

- w482 Time Code
- DCF Time Code
- GPS Time Code

Network Option

- Network Synchronisation
- Fitted with a 10/100Base-T Ethernet port allowing synchronisation from a remote NTP/SNTP time server on a TCP/IP network

(Order Number 4010N.220.x.S)

Model	LED colours	Case Size L x H x D
4010E.220.R.S	Red	1070 x 320 x 58
4010E.220.G.S	Green	

JOB NO.:		TITLE	<p>A.B.N. 69 086 651 014 P.O. Box 115 - 18 Rose Street ANNANDALE NSW 2038 Ph: +61 2 8205 0575 Fax: +61 2 9571 9754 Email: sales@hertzelectronics.com.au Web: www.hertzelectronics.com.au</p>
DATE:		7-Segment Type Digital LED Clock 4010E.220.x.S Maintenance-free, long life in aluminium surface mounting case for indoor applications	
DWN:		CUSTOMER:	