
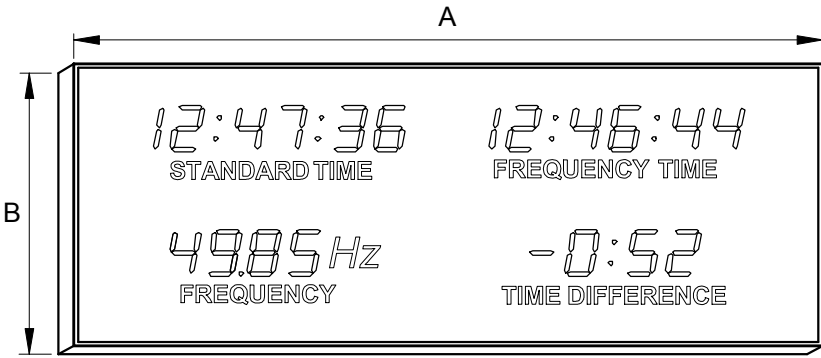


JOB NO.:	DWG NO.:	TITLE:
DATE:	SCALE:	6100.02.X.S Frequency Control Clock
DWN:	SIZE:	
NM	A4	CLIENT:
COPYRIGHT: The drawing remains the property of Hertz Electronics Pty Ltd and may not be used, copied, or reproduced, in whole or part in any form without written permission.		
		
P.O. Box 115 - 18 Rose Street ANNANDALE NSW 2038 Ph: +61 2 8205 0575 Fax: +61 2 9571 9754 Email: sales@hertzelectronics.com.au Web: www.hertzelectronics.com.au A.B.N. 69 086 651 014		



Type Number	LED Colour	Figure Height mm	Legibility m	A mm	B mm	Depth mm
6100.02.R.S	red	20	10	240	130	58
6100.02.G.S	green	20	10	240	130	58

Features

- Bright red or green LED
- 20mm Figures, legibility: 10 m
- Isolated voltage input for the frequency time
- Frequency Time accuracy: +/- 0.001 +/- 1 digit 20-80 Hz
- Reference time obtained from external master clock or internal TCXO quartz crystal time with an accuracy better than 0.1 sec/day at 0 - 50 deg.
- Serial RS232 + RS485 data port
- Optional IRIG-B or 488.HS3 GPS satellite time synchronisation
- Power supply: 100 - 250VAC 50/60 Hz
- Optional 24VDC power supply
- Aluminium Extruded Case, matt black anodised

Electromagnetic Compatibility & Safety

600 series frequency control clocks comply with the european Community Electromagnetic Compatibility Directive 89/336/EEC and Low Voltage Directive 73/23/EEC and conform with following Standards:

- EN 50081-1** 55022 class B
- EN 50082-1** IEC 801-2 level 3
IEC 801-3 level 3
IEC 801-4 level 3
- EN 60950**

S. Surface Mounted Case

Panel mounting case-style information on request.

